





STWQ4-14A



	Capacity for single line	4-12mm
	Capacity for double line	4-10mm
	Max.Bending Angle	+180°
	Bending Direction	Clock Wise
	Max.Feeding Speed	85m/s
	Max.Length for Hoops	1000*1000mm
	Min.Length for Hoops	50mm
	Motor Power for Feeding	15kw
	Motor Power for Bending	5.5kw
	Mean Power	5kw/h
	Net Weight	2200kg
	Overall Dimension	4150*1220*2040mm

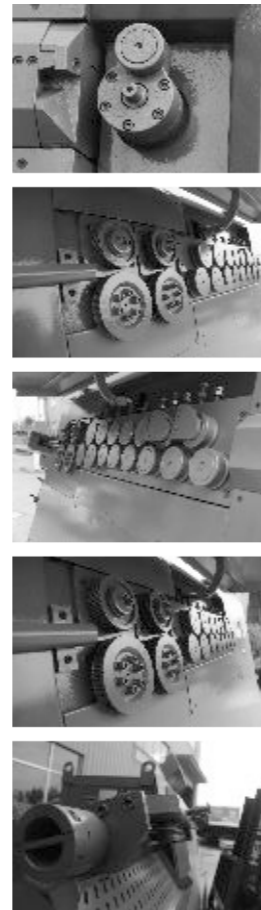


STWQ4-14B

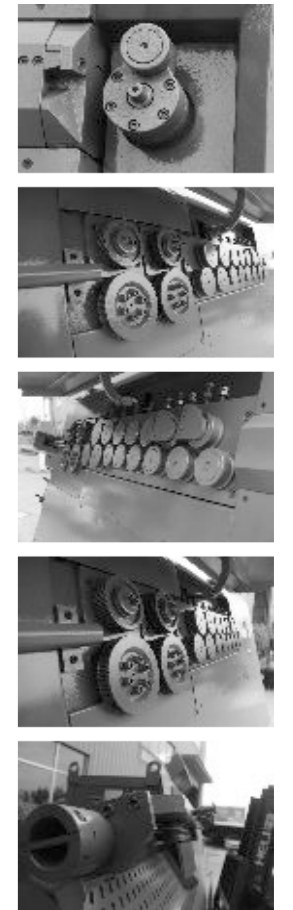


	Capacity for single line	4-12mm
	Capacity for double line	4-10mm
	Max.Bending Angle	±180°
	Bending Direction	Clock Wise & Anti-Clock Wise
	Max.Feeding Speed	100m/s
	Max.Length for Hoops	1000*1000mm
	Min.Length for Hoops	50mm
	Motor Power for Feeding	22kw
	Motor Power for Bending	7.5kw
	Mean Power	6kw/h
	Net Weight	2300kg
	Overall Dimension	4100*2100*1200mm



STWQ4-14C

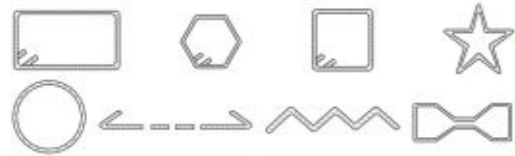


	Capacity for single line	4 - 12mm
	Capacity for double line	4 - 10mm
	Max. Bending Angle	± 180°
	Bending Direction	Clock Wise & Anti-Clock Wise (Lath)
	Max. Feeding Speed	100m/s
	Max. Length for Hoops	1000*1000mm
	Min. Length for Hoops	50mm
	Motor Power for Feeding	22kw
	Motor Power for Bending	7.5kw
	Mean Power	6kw/h
	Net Weight	3000kg
	Overall Dimension	4500*2100*1200mm

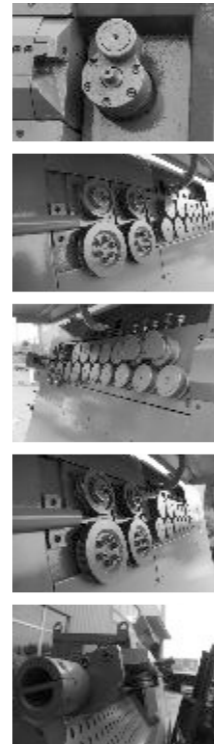

STWQ4-14D



	Capacity for single line	4 - 12mm
	Capacity for double line	4 - 10mm
	Max. Bending Angle	± 180°
	Bending Direction	Clock Wise & Anti-Clock Wise (Lath)
	Max. Feeding Speed	100m/s
	Max. Length for Hoops	1000mm
	Min. Length for Hoops	50mm
	Motor Power for Feeding	22kw
	Motor Power for Bending	7.5kw
	Mean Power	6kw/h
	Net Weight	3500kg
	Overall Dimension	3800*2000*1500mm

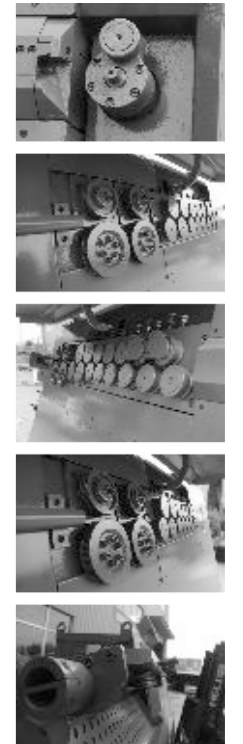

# AUTOMATIC REBAR STIRRUP BENDER



STWQ4-12A



	Capacity for single line	4-10mm
	Capacity for double line	4-8mm
	Max. Bending Angle	+180°
	Bending Direction	Clock Wise
	Max. Feeding Speed	85m/s
	Max. Length for Hoops	950*950mm
	Min. Length for Hoops	50mm
	Motor Power for Feeding	9kw
	Motor Power for Bending	3.75kw
	Mean Power	4kw/h
	Net Weight	1900kg
	Overall Dimension	3630*1100*1900mm

